



Widebay

Metal Halide

Internal lighting



Pendant Industrial luminaire with excellent light throw characteristics providing high vertical light levels. Ideal for general industrial, warehouse, and food industry application.

Construction: IP65 aluminium reflector combined with high impact acrylic refractor permanently sealed to the reflector. IP20 ballast enclosure as standard. IP65 Heavy Duty Housing on request.

Lamp Access: Hinged and silicone gasketed optical assembly is held in place by heavy-duty corrosion resistant, high compression latches. Safety cable between optical/ballast assembly permits hands free relamping.

Gear: Integral (as shown). Remote on request.

Lamps: Up to 450w PMH or 400w HPS.

Options: Available with HID dimming system on request. Also available in surface mounted version or in recessed version (Cleanbay). For LED version - see separate leaflet.



Cleanbay




Widebay reflector remote (c/w socket assembly and hook)



DIMENSIONS


WIDEBAY

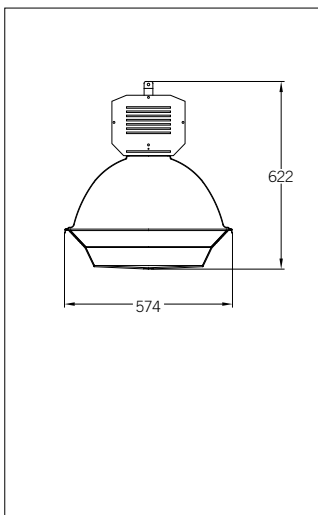

All dimensions are in mm.

CLEANBAY

Ceiling cut out = B

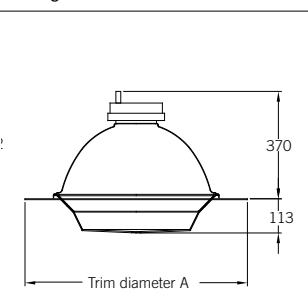

	A	B
FF	765	720
BL	730	620


All dimensions are in mm.

APPLICATION GUIDE

WIDEBAY 450W PMH

Spacing	Mounting height			
	6m	8m	10m	12m
6m	731	694	657	624
8m	414	392	372	352
10m	283	268	255	241
12m	187	176	167	158

Average lux level on floor using LLF = 0.80.
Reflectances 0.5/0.5/0.2 for ceiling, walls and floor.
Recommended spacing up to 2 times the mounting height.

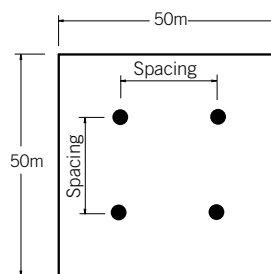

ORDERING CODE

Code - with IP20 Ballast	Code - Heavy Duty	Lamp Type	Description
WIDEBAY			
3WDB15PGA	3WDB15PWA	250w PMH	Pendant with Internal Gear
3WDB15SGA	3WDB15SWA	250w HPS/MH	Pendant with Internal Gear
3WDB16PGA	3WDB16PWA	400w PMH	Pendant with Internal Gear
3WDB17PGA	3WDB17PWA	400w HPS/MH	Pendant with Internal Gear
3WDB17PGA	3WDB17PWA	450w PMH	Pendant with Internal Gear

CLEANBAY

Code	Description
3CLE00001	Fixture Free Version (FF) excluding gear *
3CLE00003	Smaller Bolted Version (BL) excluding gear *

* Gear for Cleanbay to be ordered separately.

OPTIONS

LTM: Litematic/Instant Start

EM: Emergency